


钟形罩—特殊材质


尼龙钟形罩

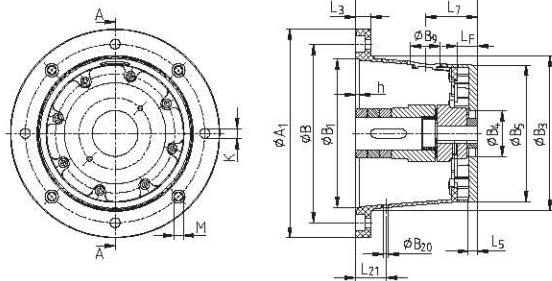

- 特殊尼龙材质钟形罩
 - 耐高温，耐潮湿
 - 刚度与铝质钟形罩相似
 - 极好的减振性能
- 可替换带减振环的钟形罩，成本低
- 安装面精加工
- 泵侧有铝质安装法兰
- 电机轴与泵轴自对中
- 配各种液压泵的钟形罩都有库存，交货期短
- 请参阅我们的安装说明书
- 工作温度-10℃~60℃

尼龙钟形罩																							
IEC电机 规格 (轴伸) d1 x ls	KW P 1500 1/min	钟形罩规格	DP 垫片 规格	PTFL 支架 规格*)	尺寸 (mm)																		
					A ₁	B	B ₁	B ₂	h	K	M	L ₁	L ₂	L ₃	L ₄	B ₅	最小 B ₆	透气孔		泄油孔			
																	B ₇	L ₇	B ₈	L ₈			
100L/112M (28X60)	2,2	KPT250/2/..	250	250	250	215	180	190	7	14	M12	120	12	19	12	166	35	54	40	52			
	3	KPT250/3/..										124	16				58	57			7,5	43	
	4	KPT250/4/..										135	27				58	57			7,5		
		KPT300/2/..										144	15				57	63					
132S/132M (38x80)	5,5	KPT300/3/..	300	300	300	265	230	234	7	14	M12	155	26	20	15	208	56	68	50	74			
	7,5	KPT300/4/..										168	39				57	74			7,5	45	
		KPT300/5/..										196	67				57	84					
												KPT350/2/..	188				18	56					82
160M/160L (42x110)	11	KPT350/2/..	350	350	350	300	250	260	7	17	M16	204	34	26	15	230	77	87	50	102			
	15	KPT350/3/..										228	58				97	102			7,5	51	
		18,5										KPT350/4/..											
												22											

铸铁钟形罩

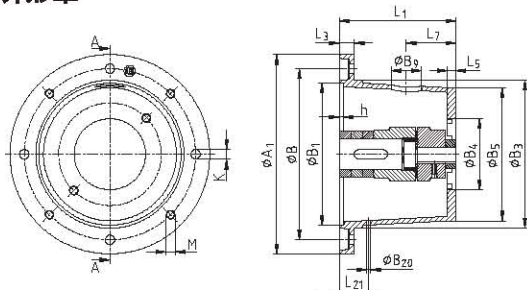

- 铸铁钟形罩材质EN-GJL-250
- 适用于重载
- 可应用在矿业和海洋设备
- 对各种液压油和海水都耐腐蚀
- 安装面精加工
- 电机轴和泵轴自对中
- 重量重，减振性能好
- 配各种液压泵的钟形罩都有库存，交货期短
- 请参阅我们的安装说明书

铸铁钟形罩																					
IEC电机 规格 (轴伸) d1 X ls	KW P 1500 1/min	钟形罩规格	DP 垫片 规格	PTFL 支架 规格	尺寸 (mm)																
					A ₁	B	B ₁	B ₂	h	K	M	L ₁	L ₂	L ₃	B ₃	最小 B ₄	泄气孔		泄油孔		
																	B ₅	L ₇	B ₂₀	L ₂₁	
132S/132M (38x80)	5,5 7,5	PG 300/5/..	300	300	300	265	230	234	5	14	M12	144	20	15	215	30	50	63	7,5	45	
160M/160L (42x110) 180M/180L (48x110)	11 - 22	PG 350/4/..	350	350	350	300	250	260	7	17	M16	188	26	15	242	76	50	82	7,5	51	
		PG 350/6/..										204			235			87			
200L (55x110)	30	PG 400/4/..	400	400	400	350	300	300	7	17	M16	204	26	20	260	97	50	92	7,5	51	
		PG 400/5/..										228			280			104			
225S/225M (60x140)	37 45	PG 450/2/..	450	450	450	400	350	350	7	17	M16	234	26	24	289	97	50	107	7,5	51	
		PG 450/3/..										262		20	315			121			
250M (65x140) 280S/280M (75x140)	55 75 90	PG 550/1/..	550	550	550	500	450	450	7	17	M16	265	26	25	360	97	50	125	7,5	51	
		PG 550/8/..										248						116			
315S/315M (80x170)	110 - 160	PG 680/5/..	680	680	680	600	550	550	8	22	M20	330	32	30	425	119	50	157	7,5	60	

若需透气孔或泄油孔，请在订单中注明

订货描述示例:	PG	KPT	25
---------	----	-----	----