


钟形罩附件



- 可在油箱外部进行整体拆卸
- 清洁维护简单
- 油管穿过安装法兰连接
- 材质为铝
- 可与P350及以下的钟形罩相配
- 可配DP型和DZ型NBR密封圈
- DP, DZ垫圈的材质为丁苯橡胶(NBR)
- DP垫圈安装在钟形罩和油箱之间或钟形罩与ZO安装法兰之间
- DZ垫圈安装在ZO安装法兰和油箱盖之间

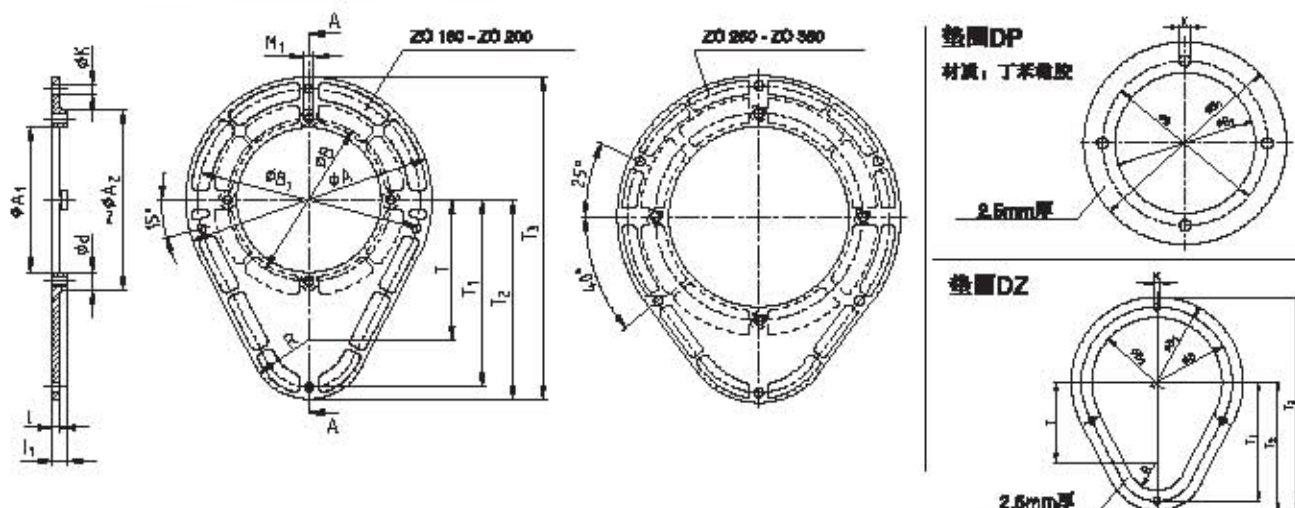

ZO安装法兰																
规格	尺寸(mm)															密封圈 尺寸(mm)
	A	A ₁	A ₂	B	B ₁	K	M	R	T	T ₁	T ₂	T ₃	d	l	l ₁	
ZO 160	210	112	160	130	185	9	M6	60	97.5	145	167.5	202.5	18	7	16	DZ 160 DP 160
ZO 200	260	147	187	165	225	9	M10	60	142.5	190	202.5	327.5	18	8	16	DZ 200 DP 200
ZO 250	300	192	232	215	275	9	M12	60	142.5	190	202.5	352.5	20	8	16	DZ 250 DP 250
ZO 300	360	236	296	265	320	14	M12	60	150	225	240	420	20	10	18	DZ 300 DP 300
ZO 350	410	292	332	300	360	14	M16	110	180	228	270	475	24	12	20	DZ 350 DP 350

钟形罩和安装法兰间的垫圈									
规格	尺寸(mm)								
	B	B ₁	B ₂	T	T ₁	T ₂	T ₃	K	R
DP 160	130	160	111	—	—	—	—	4 x 9	—
DP 200	165	200	146	—	—	—	—	4 x 11	—
DP 250	215	250	191	—	—	—	—	4 x 13	—
DP 300	265	300	235	—	—	—	—	4 x 13	—
DP 350	300	350	291	—	—	—	—	4 x 17	—
DP 400	360	400	301	—	—	—	—	4 x 17	—
DP 450	400	450	351	—	—	—	—	4 x 17	—
DP 550	500	550	451	—	—	—	—	4 x 17	—
DZ 160	165	210	160	97.5	145	167.5	202.5	4 x 9	35
DZ 200	225	260	200	142.5	190	202.5	327.5	4 x 9	35
DZ 250	275	300	230	142.5	190	202.5	352.5	6 x 9	35
DZ 300	290	360	260	150	225	240	420	6 x 14	80
DZ 350	390	410	350	180	255	270	475	6 x 14	80

订货描述示例:

ZO 300	DP 300
ZO安装法兰规格	ZO密封垫圈规格